


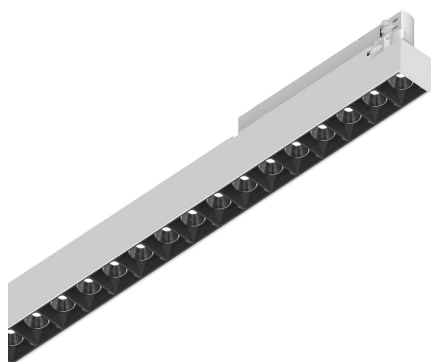

## General info


### Technical - Spotlights and Tracks

Indoor track mounted linear fitting with integrated LED sources and direct light emission

|              |                                |
|--------------|--------------------------------|
| Ean          | 8021696283524                  |
| Item         | DISPLAY ACCENT D1065 3000K WH  |
| Installation | Eutrac 3-phase track (Ceiling) |
| Guarantee    | 5 years                        |
| Gross weight | 1.48 kg                        |
| Volume       | 0.01122 m <sup>3</sup>         |

## Technical info

|                          |                                      |
|--------------------------|--------------------------------------|
| Net weight               | 1.12 kg                              |
| Insulation class         | II                                   |
| Protection index         | IP20                                 |
| Compliance               | CE                                   |
| Operating temperature    | 0° ~ +40 °C                          |
| Dimmer                   | Non-dimmable, On-Off                 |
| Power output             | 220-240 V AC 50/60 Hz                |
| Power supply             | In-built, included<br>NO, electronic |
| Accessories not included | Link on-off profile                  |



## Source info

|                        |                                           |
|------------------------|-------------------------------------------|
| Integrated source      | Integrated LED module                     |
| Replaceable source     | Replaceable (by qualified operators only) |
| Power                  | 28 W                                      |
| Emission               | Direct                                    |
| Max consupcion         | max 28 W                                  |
| Features LED           | LED SMD SAMSUNG                           |
| CCT LED                | 3000 K                                    |
| Duration LED (t. 25°C) | 50000 h                                   |
| CRI                    | > 80                                      |
| SDCM                   | 3                                         |
| Light beam             | 60°                                       |
| UGR Maximum            | < 16                                      |
| Light beam flux        | 3500 lm                                   |
| Useful light flux      | 3000 lm                                   |
| Photobiological risk   | 1                                         |
| Standby power          | < 0.50 W                                  |