



Novelties 2023



Nowodvorski
LIGHTING



Nowodvorski
LIGHTING

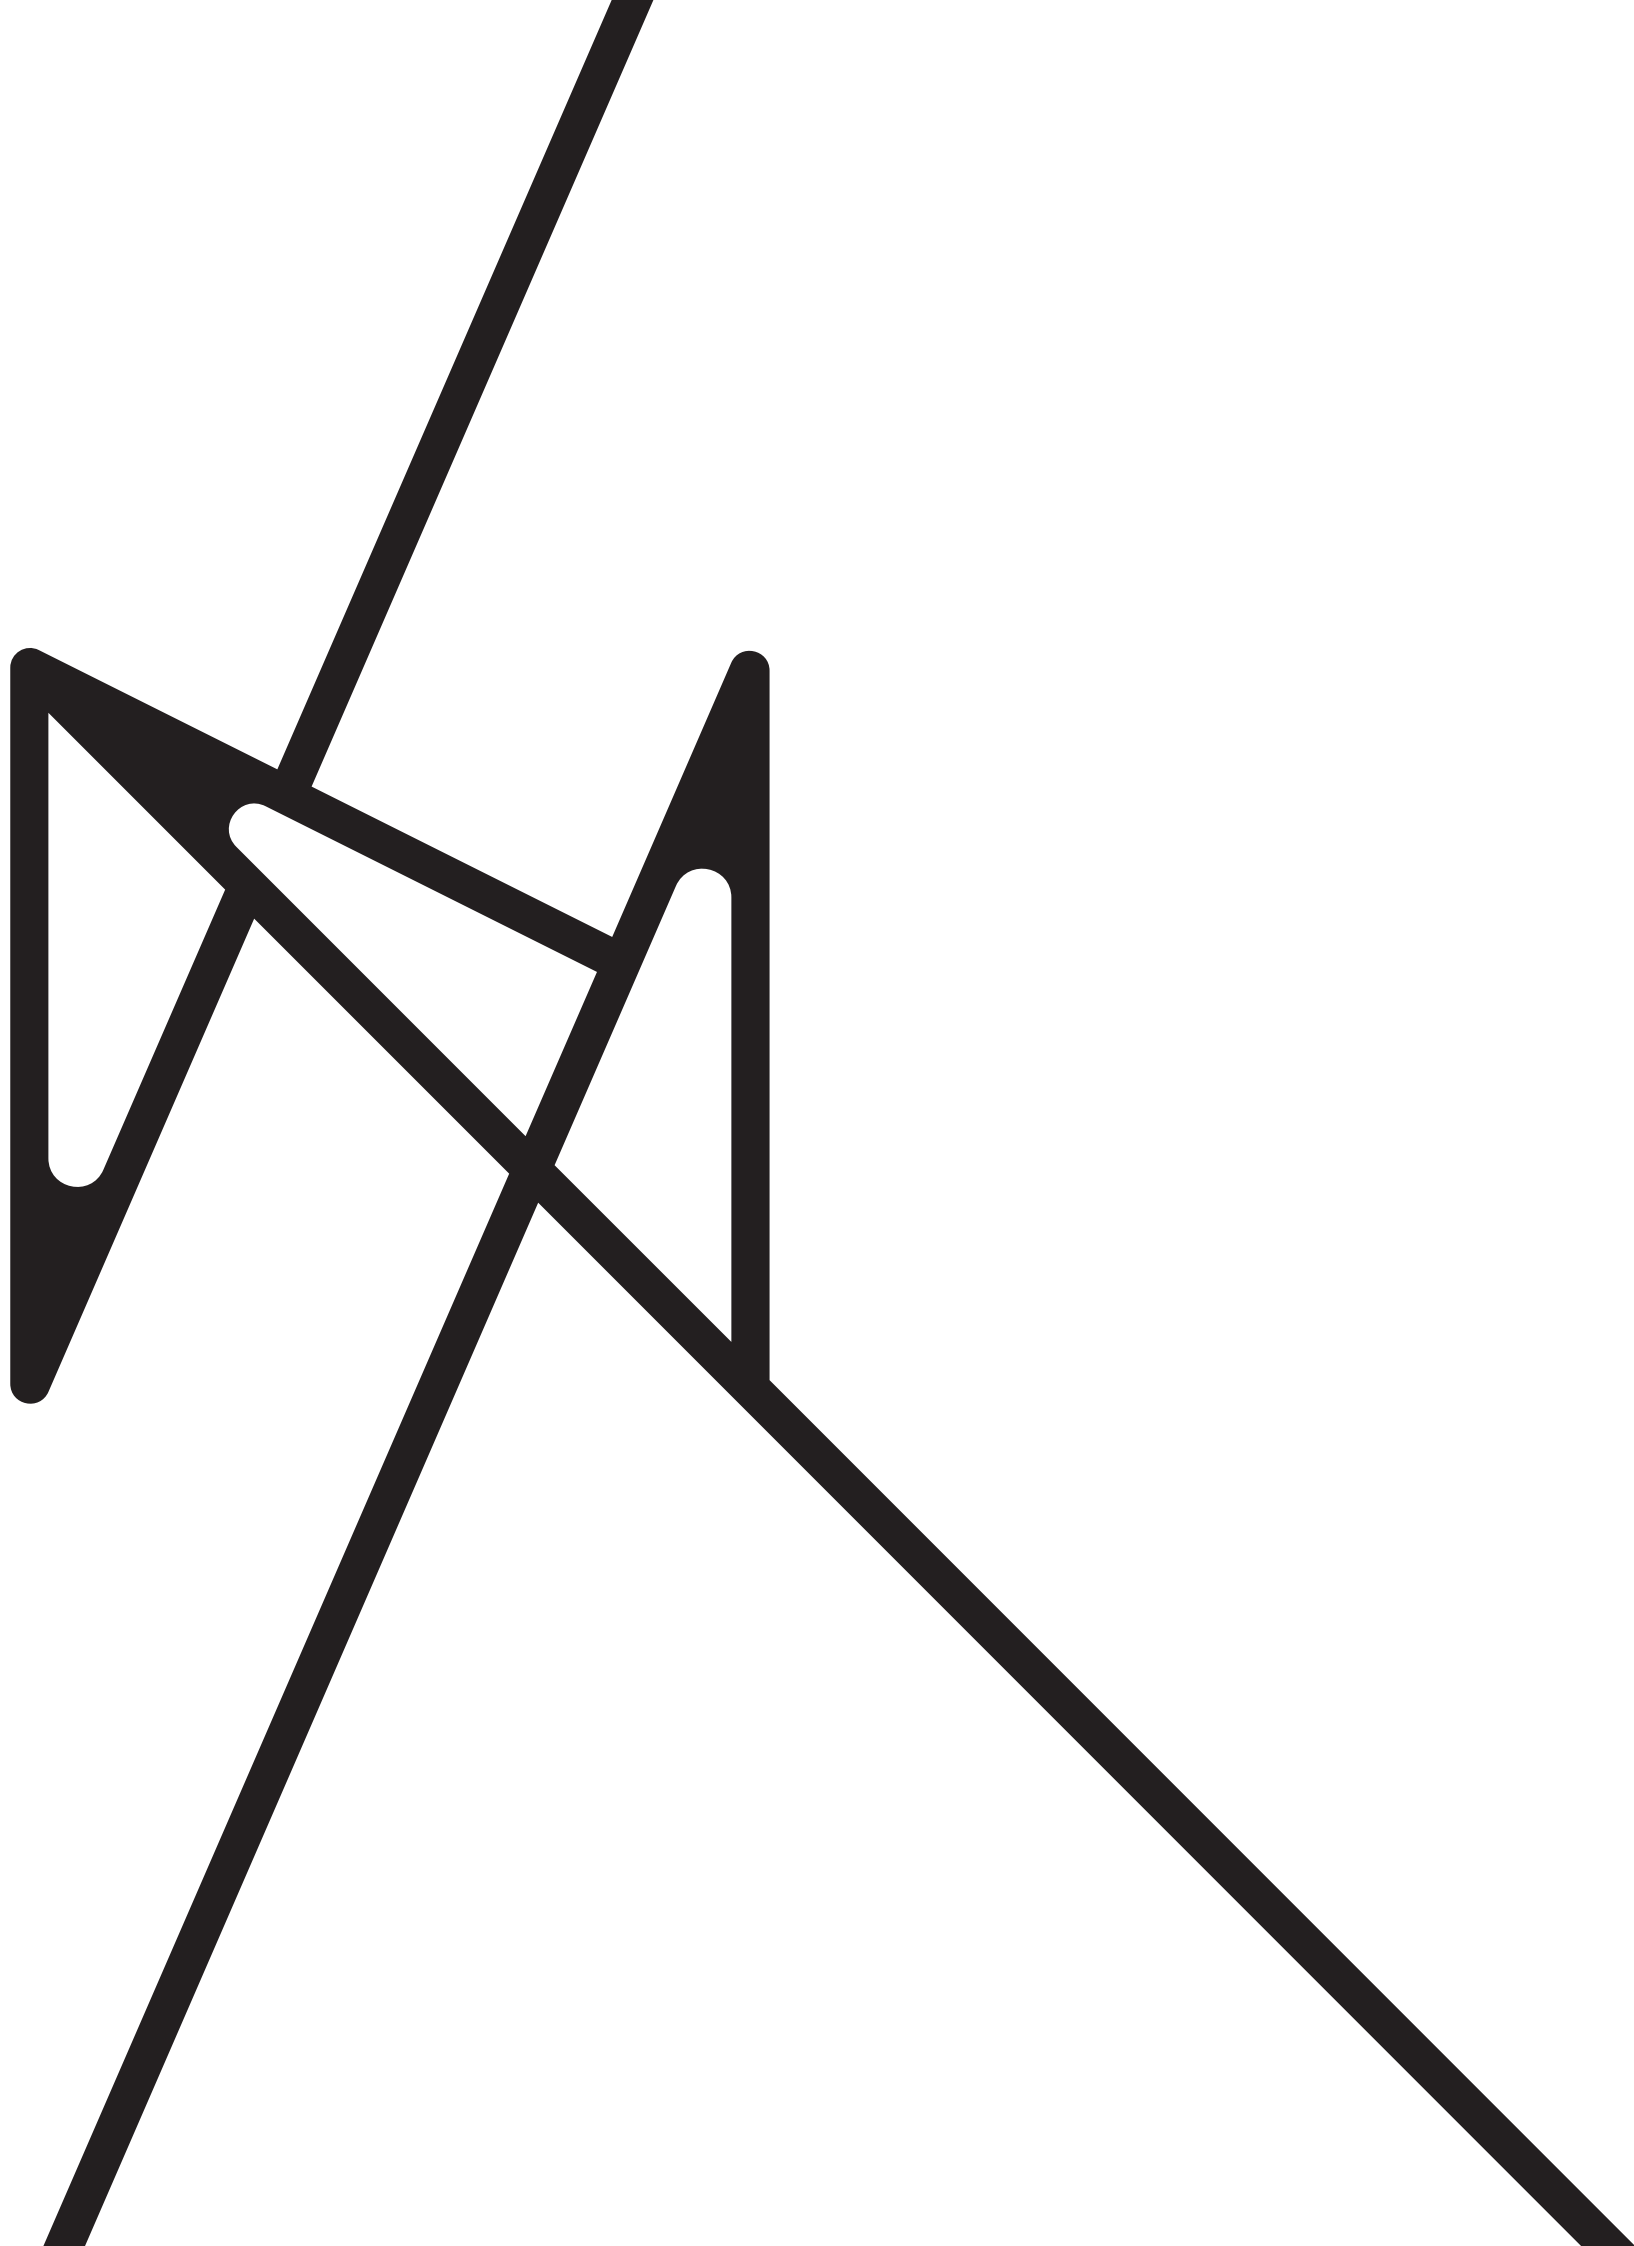

Novelties
2023



LVM TRACK 2M
10163

LVM FOCUS OUT LED 15 W
10151

LVM LINE LED 9W
10143

LVM RECESSED TRACK 2M
10157

LVM TRACK 2M
10163


LVM
LOW VOLTAGE MAGNETIC



LVM FOCUS LED 15W
10150




LVM FOCUS LED 9W
10144

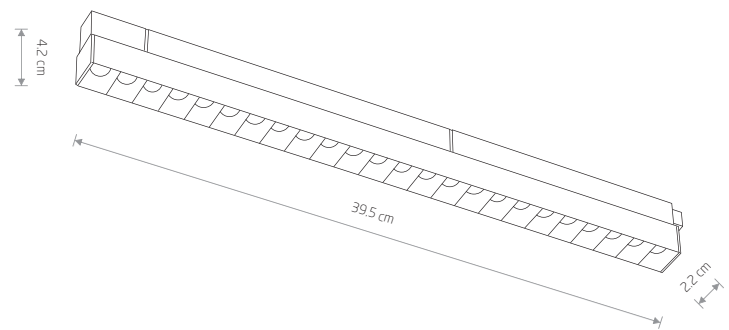

LVM FOCUS LED 15W

■ painted aluminum, plastic

■ 10150

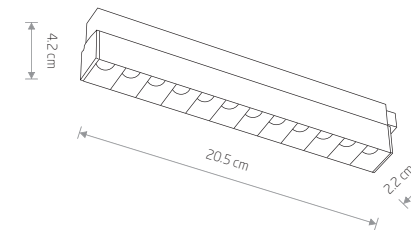

LVM FOCUS LED 9W

■ painted aluminum, plastic

■ 10144



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10150	15W LED	3000K	1300 lm	30°	>90	48V	⚡	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10144	9W LED	3000K	800 lm	30°	>90	48V	⚡	IP20	30000h

■ BLACK


■ BLACK



LVM FOCUS OUT LED 15W
10151




LVM FOCUS OUT LED 9W
10145

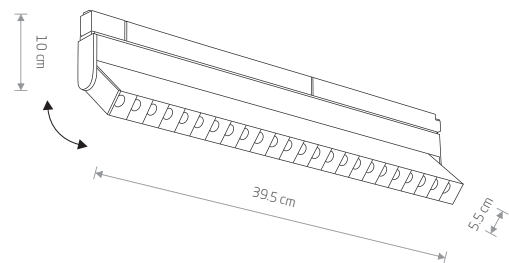

LVM FOCUS OUT LED 15W

■ painted aluminum, plastic

■ 10151



LVM FOCUS OUT LED 9W

■ painted aluminum, plastic

■ 10145



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10151	15W LED	3000K	1300 lm	30°	>90	48V	⚡	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10145	9W LED	3000K	800 lm	30°	>90	48V	⚡	IP20	30000h

■ BLACK

■ BLACK

LVM LINE LED 15W
10148

LVM LINE LED 9W
10143

LVM LID LED 8W
10152

LVM TRUCK 2M
10163






LVM LINE LED 15W
10148




LVM LINE LED 9W
10143

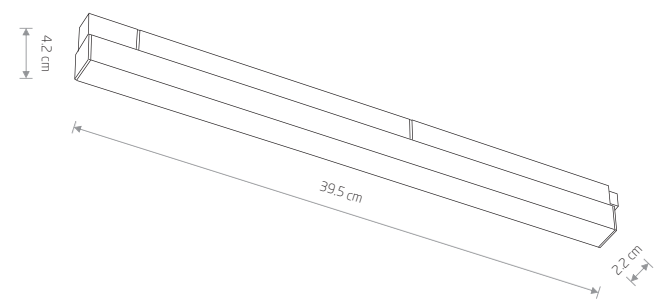

LVM LINE LED 15W
painted aluminum, plastic

- 10148
- ■

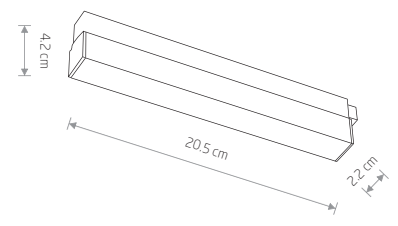

LVM LINE LED 9W
painted aluminum, plastic

- 10143
- ■

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10148	15W LED	3000K	700 lm	110°	>90	48V	⚡	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10143	9W LED	3000K	400 lm	110°	>90	48V	⚡	IP20	30000h

■ BLACK


■ BLACK



LVM SPOT LED 15W
10147




LVM SPOT LED 9W
10142



LVM SPOT LED 15W

painting aluminum, plastic

■ 10147



LVM SPOT LED 9W

painting aluminum, plastic

■ 10142



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10147	15W LED	3000K	1020 lm	30°	>90	48V	⚡	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10142	9W LED	3000K	780 lm	30°	>90	48V	⚡	IP20	30000h

■ BLACK

■ BLACK



LVM RECESSED TRACK 2M
10157

LVM FOCUS OUT LED 9W
10145

LVM FOCUS OUT LED 15W
10151

LVM ROLLER LED 9W
10146



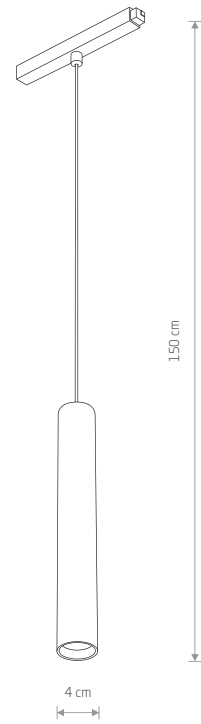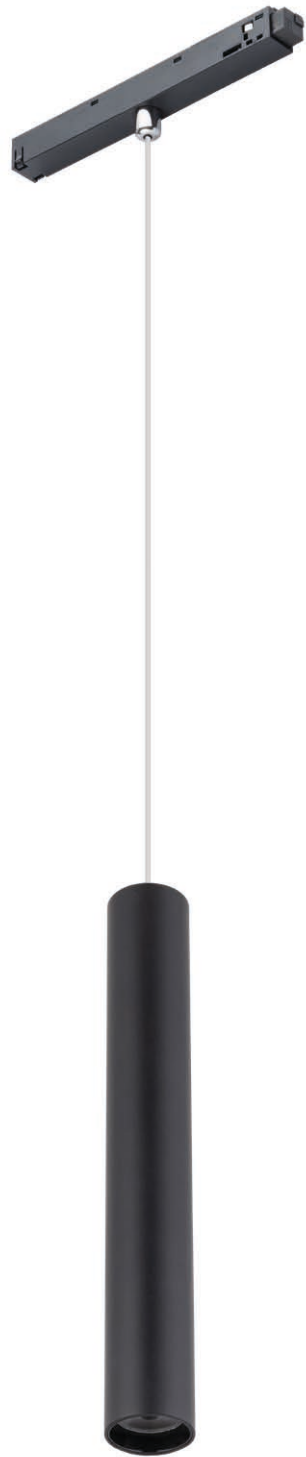

LVM ROLER LED 9W
 painted aluminum, plastic

■ 10146



LVM ROLER LED 9W
 10146



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10146	9W LED	3000K	620 lm	36°	>90	48V	⚡	IP20	30000h

■ BLACK

LVM FOCUS OUT LED 15W
10151

LVM SPOT LED 15W
10147

LVM FOCUS OUT LED 9W
10145



LVM SLOT LED 5W
10154






LVM SLOT LED 5W
10154




LVM SLOT LED 8W
10155

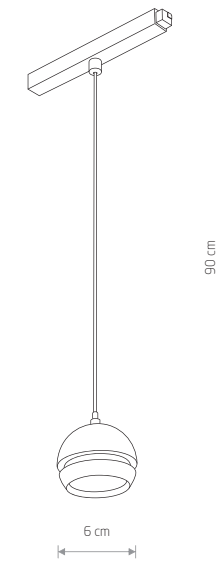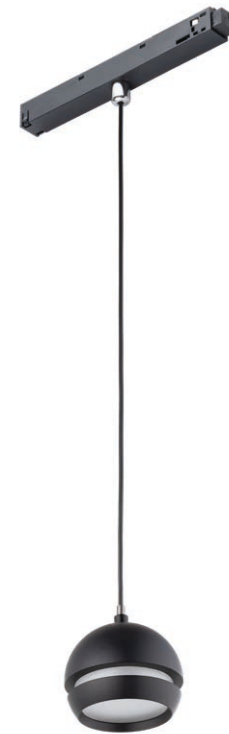


LVM SLOT LED 5W
painted aluminum, plastic PMMA

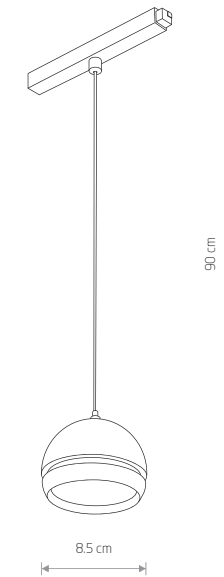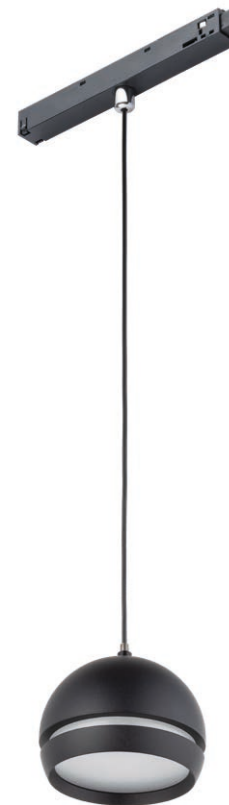

LVM SLOT LED 8W
painted aluminum, plastic PMMA




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10154	5W LED	3000K	210 lm	100°	>90	48V	⚡	IP20	30000h
10155	8W LED	3000K	370 lm	100°	>90	48V	⚡	IP20	30000h



LVM LID LED 8W
 painted aluminum, plastic PMMA

■ 10152

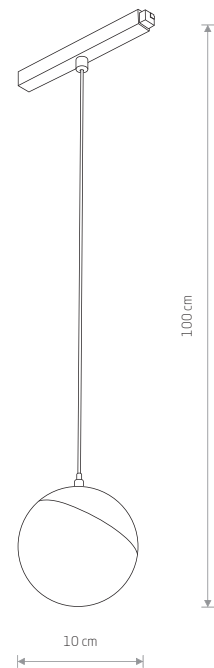

LVM LID LED 8W
 painted aluminum, plastic PMMA


■ 10153



LVM LID LED 8W
 10153

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10152	8W LED	3000K	650 lm	160°	>90	48V	⚡	IP20	30000h
10153	8W LED	3000K	650 lm	160°	80	48V	⚡	IP20	30000h

■ BLACK □ WHITE

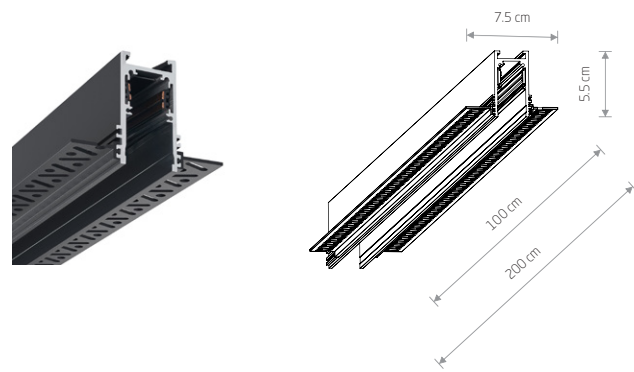

LVM RECESSED TRACK 1M


aluminum

■ 10156

LVM RECESSED TRACK 2M

aluminum

■ 10157

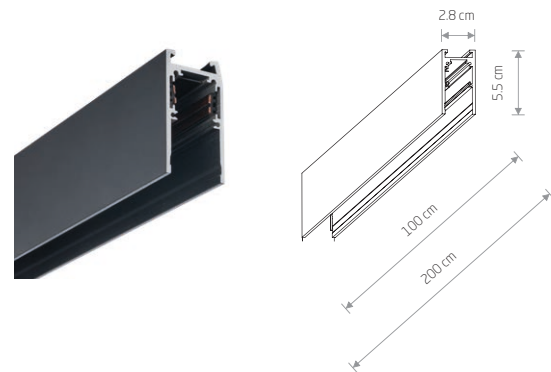

LVM TRACK 1M


aluminum

■ 10162

LVM TRACK 2M

aluminum


■ 10163

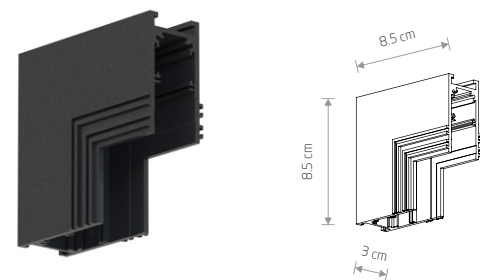

LVM RECESSED INSIDE CORNER

aluminum


■ 10160

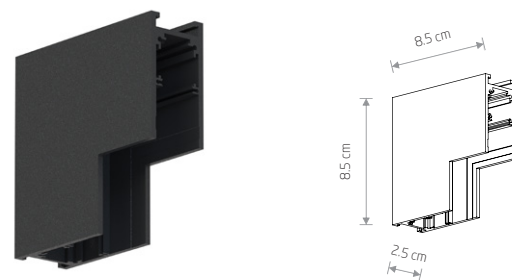

LVM INSIDE CORNER

aluminum


■ 10165

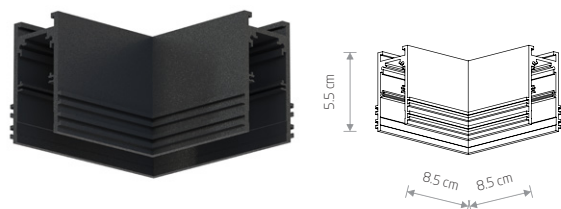

LVM RECESSED HORIZONTAL CORNER

aluminum


■ 10158

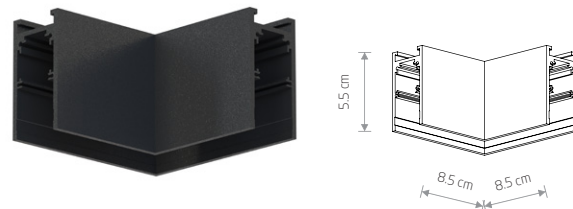

LVM HORIZONTAL CORNER

aluminum


■ 10164

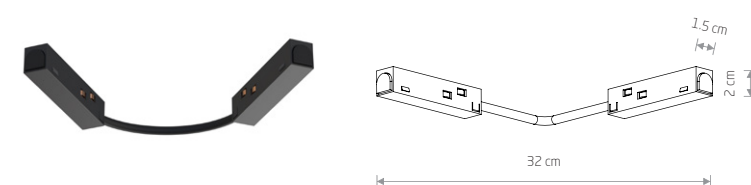

LVM CORNER CONDUCTIVE MODULE

plastic


■ 10166

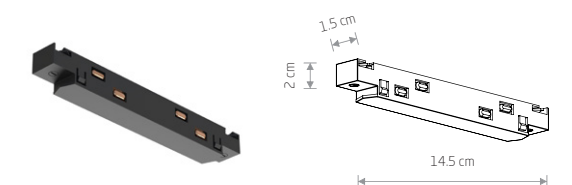

LVM STRAIGHT CONDUCTIVE MODULE

plastic


■ 10167

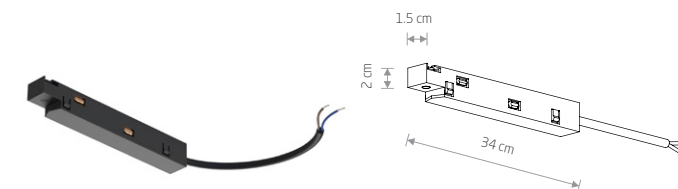

LVM OUTSIDE POWER SUPPLY CONDUCTIVE MODULE

plastic


■ 10168

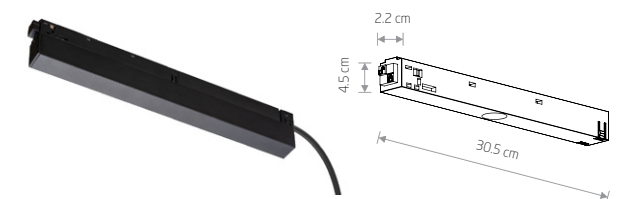

LVM 48V, 150W, INSIDE POWER SUPPLY

aluminum


■ 10161

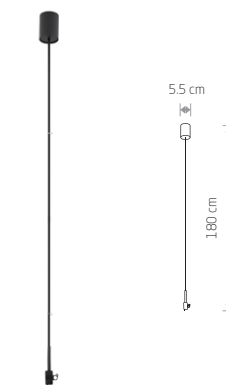

LVM POWER SUPPLY KIT

plastic, painted steel

■ 10597

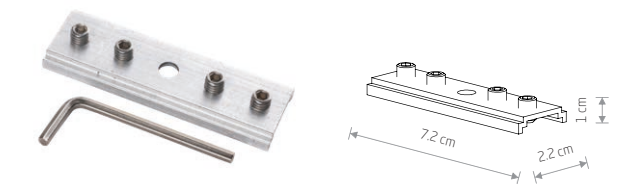

LVM TRUCK BUCKLE CONNECTOR

steel

■ 10171




LVM SUSPENSION KIT

steel

■ 10170

MIDI LED 10055




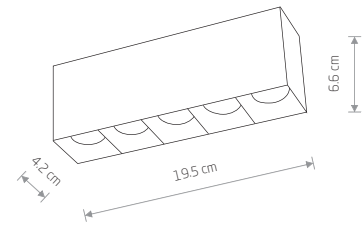


MIDI LED

painted aluminum

10048 3000K 10052 4000K

10055 3000K 10058 4000K

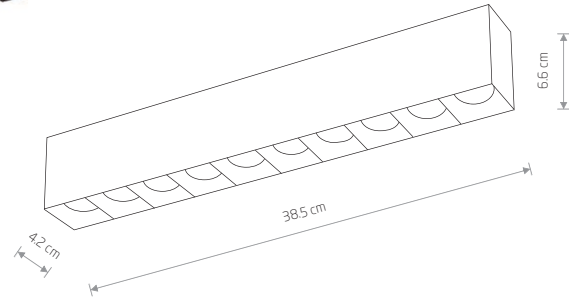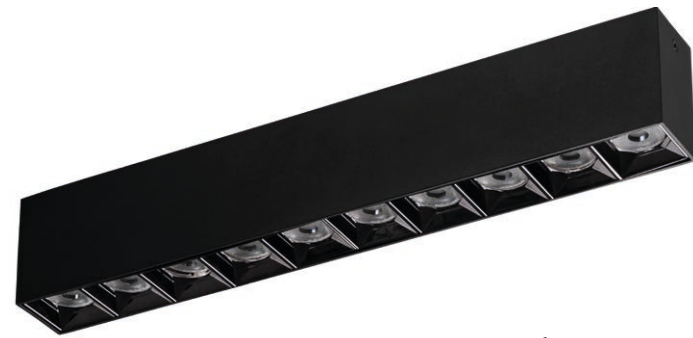

MIDI LED

painted aluminum

10050 3000K 10053 4000K

10056 3000K 10060 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10048	20W LED	3000K	1700 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10052	20W LED	4000K	1800 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10055	20W LED	3000K	1700 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10058	20W LED	4000K	1700 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10050	40W LED	3000K	3500 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10053	40W LED	4000K	3500 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10056	40W LED	3000K	3500 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10060	40W LED	4000K	3500 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h


☐ WHITE ■ BLACK



MIDI LED 10050



MIDI LED 10047

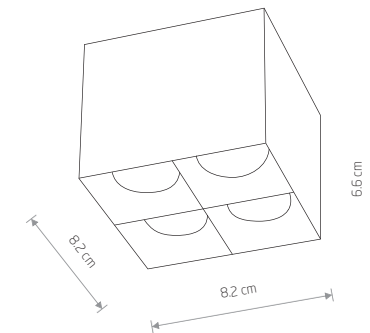

MIDI LED

painting aluminum


10047 3000K 10051 4000K

10054 3000K 10057 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10047	16W LED	3000K	1500 lm	36°	>90	220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10051	16W LED	4000K	1540 lm	36°	>90	220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10054	16W LED	3000K	1500 lm	36°	>90	220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10057	16W LED	4000K	1540 lm	36°	>90	220-230 V, 50/60 Hz	□	>0.5	IP20	30000h

WHITE BLACK



FOCUS MINI LED

painting aluminum

- 10067 3000K
 10070 4000K
- 10068 3000K
 10071 4000K




FOCUS MIDI LED
10071

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10067	10W LED	3000K	600 lm	36 °	>90	220-230 V, 50/60 Hz	☐	>0,9	IP20	30000h
10070	10W LED	4000K	600 lm	36 °	>90	220-230V V, 50/60 Hz	☐	>0,9	IP20	30000h
10068	10W LED	3000K	600 lm	36 °	>90	220-230 V, 50/60 Hz	☐	>0,9	IP20	30000h
10071	10W LED	4000K	600 lm	36 °	>90	220-230 V, 50/60 Hz	☐	>0,9	IP20	30000h

WHITE
 BLACK



MINI LED RECESSED
10042




MINI LED RECESSED

painting aluminum

10042 3000K 10043 4000K



cut out 140x35 mm

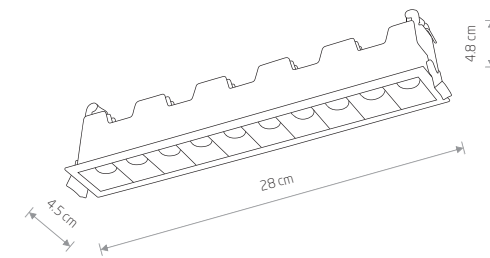

MINI LED RECESSED

painting aluminum


10045 3000K 10046 4000K



cut out 275x35 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10042	10W LED	3000K	600 lm	30°	>90	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10043	10W LED	4000K	660 lm	30°	>90	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10045	20W LED	3000K	1220 lm	30°	>90	220-230 V, 50/60 Hz	□	>0.9	IP20	30000h
10046	20W LED	4000K	1280 lm	30°	>90	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h

WHITE BLACK





MIDI LED RECESSED

■ painted aluminum

■ 10061 3000K ■ 10064 4000K



✓ cut out 85×85 mm

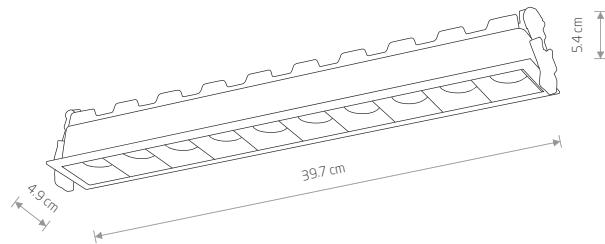

MIDI LED RECESSED

■ painted aluminum

■ 10062 3000K ■ 10065 4000K



✓ cut out 200×45 mm

MIDI LED RECESSED

■ painted aluminum

■ 10063 3000K ■ 10066 4000K



✓ cut out 390×45 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10061	16W LED	3000K	1400 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10064	16W LED	4000K	1400 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10062	20W LED	3000K	1800 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10065	20W LED	4000K	1830 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10063	40W LED	3000K	3300 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10066	40W LED	4000K	3300 lm	36°	>90	220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h

■ BLACK



MINI LED RECESSED
10063





MONO DEEP 10466

MONO DEEP 10468




MONO DEEP

painting steel, plastic PC

10464 10458

1xGU10, max 10W only LED

cut out 64x138 mm






MONO DEEP

chrome plated steel, plastic PC

10467 10462

4xGU10, max 10W only LED

cut out 64x685 mm

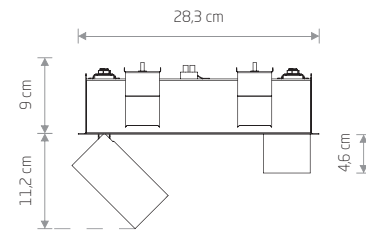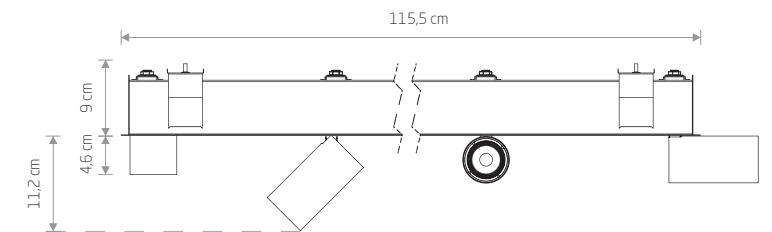





MONO DEEP

painting steel, plastic PC

10465 10460

2xGU10, max 10W only LED

cut out 64x268 mm

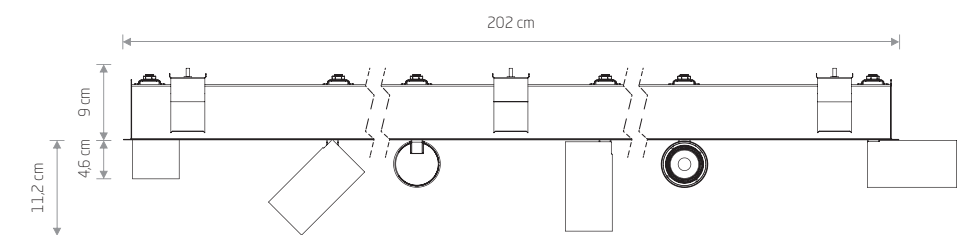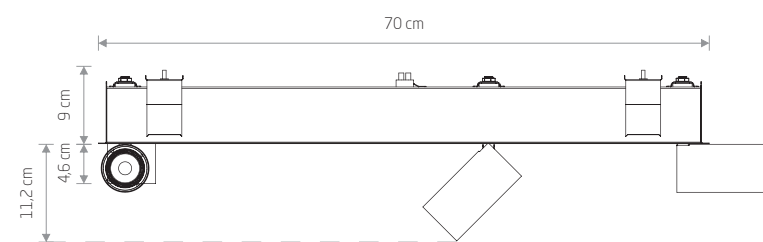

MONO DEEP

painting steel, plastic PC

10466 10461

3xGU10, max 10W only LED

cut out 64x685 mm

MONO DEEP

painting steel, plastic PC

10468 10463

6xGU10, max 10W only LED

cut out 64x2002 mm




CAMELEON ADAPTER CTLS
8281

LVM TRACK 2M
10163

CTLS MONO 10237

CAMELEON CABLE G9
8632

CAMELEON LASER 490
10248



CTLS MONO

painting steel, plastic ABS


- 10235 □ 10236
- 10238 ■ 10239

☐ 1xGU10, max 10W only LED

solid brass, plastic ABS

- 10237

☐ 1xGU10, max 10W only LED



PROFILE MONO

painting steel, plastic ABS

- 7581 ■ 7582
- 7584 ■ 7585



☐ 1xGU10, max 10W only LED

solid brass, painting steel, plastic ABS

- 7583

☐ 1xGU10, max 10W only LED

PROFILE GX53
10358

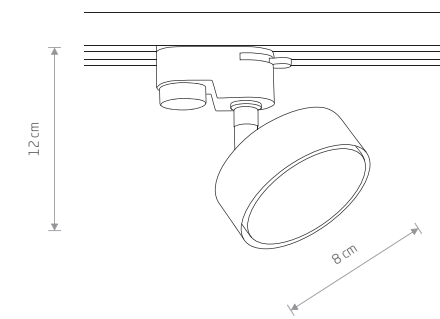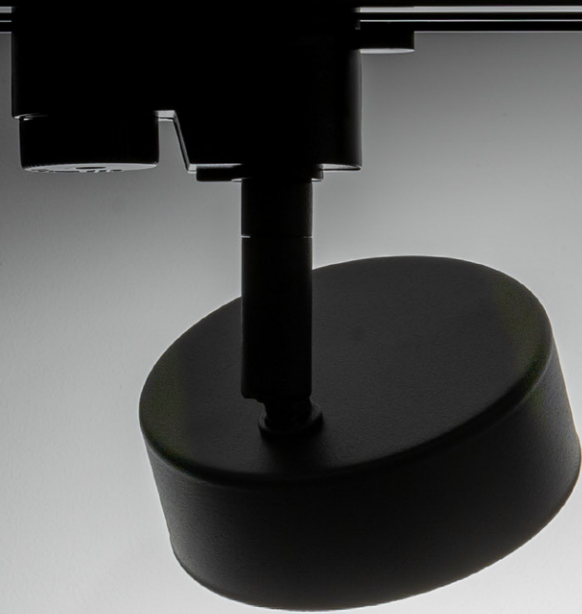


PROFILE GX53
painted steel, plastic PC

■ 10358

☑ 1xGX53, max 8W



VERTIC LED 10362

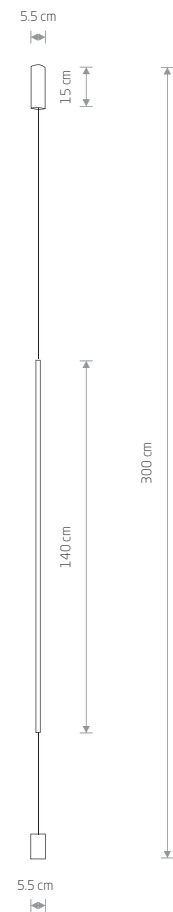


VERTIC LED

■ painted aluminum, plastic PP

■ 10362




SPIN LED M 10370

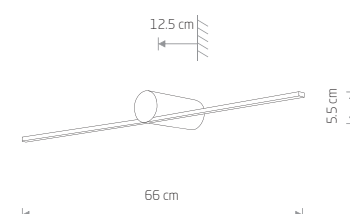

SPIN LED S

■ painted aluminum, plastic PP


■ 10368

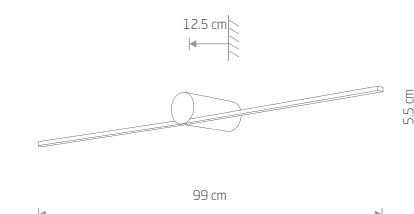

SPIN LED M

■ painted aluminum, plastic PP

■ 10370

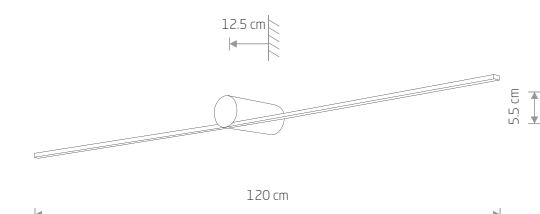

SPIN LED L

■ painted aluminum, plastic PP

■ 10371




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10368	9W LED	3000K	270 lm	100°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	50000h
10370	14W LED	3000K	420 lm	100°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	50000h
10371	17W LED	3000K	510 lm	100°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	50000h
10362	20W LED	3000K	600 lm	100°	>90	~220-230V V, 50/60 Hz	☐	>0.5	IP20	50000h

■ BLACK P013 RAL 9005

MOTIVE LED L 10313

MOTIVE LED M 10311

BAR LED M 10364

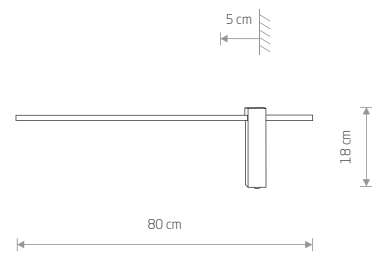

MOTIVE LED M

■ painted aluminum, plastic PP


■ 10311



MOTIVE LED L

■ painted aluminum, plastic PP


■ 10313

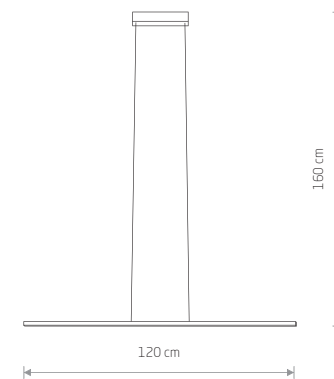

BAR LED S

■ painted aluminum, plastic PP


■ 10363

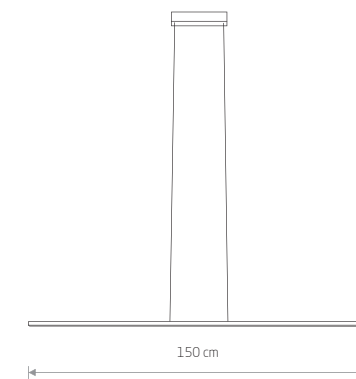

BAR LED M

■ painted aluminum, plastic PP

■ 10364

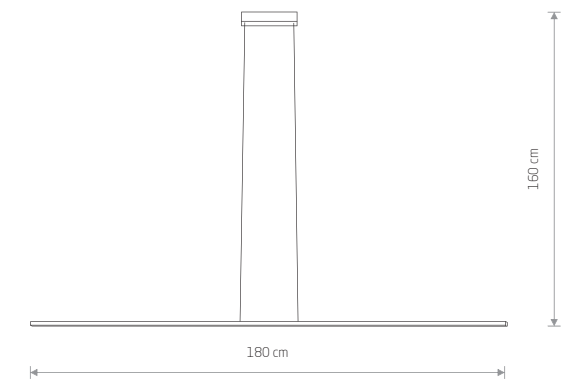

BAR LED L

■ painted aluminum, plastic PP

■ 10365



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10311	11W LED	3000K	330 lm	100°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	50000h
10313	17W LED	3000K	510 lm	100°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	50000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10363	24W LED	3000K	800 lm	100°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	50000h
10364	30W LED	3000K	1000 lm	100°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	50000h
10365	36W LED	3000K	1200 lm	100°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	50000h


LASER 750
10447

LASER 490
10453

LASER 1000
10446

LASER 1000
10444



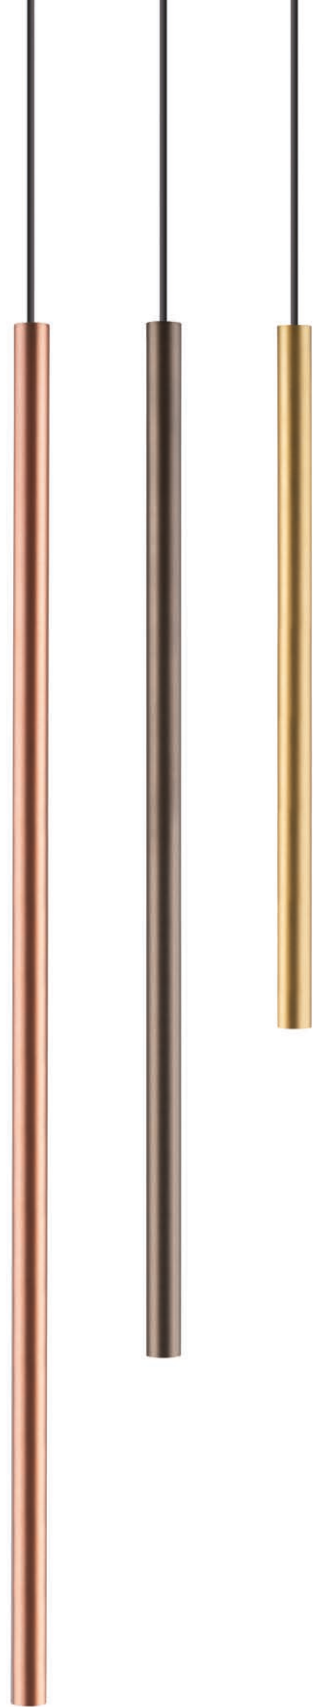


LASER 490

painted steel

10451 10452 10453

1xG9, max 10W only LED

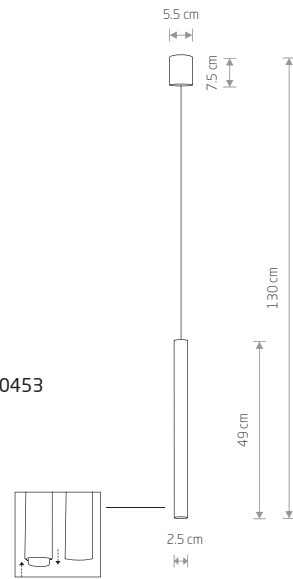


LASER 1000

painted steel

10444 10445 10446

1xG9, max 10W only LED




LASER 750

painted steel

10447 10448 10450

1xG9, max 10W only LED







LASER WALL

painted steel

10563 10564 10562

2xG9, max 10W only LED

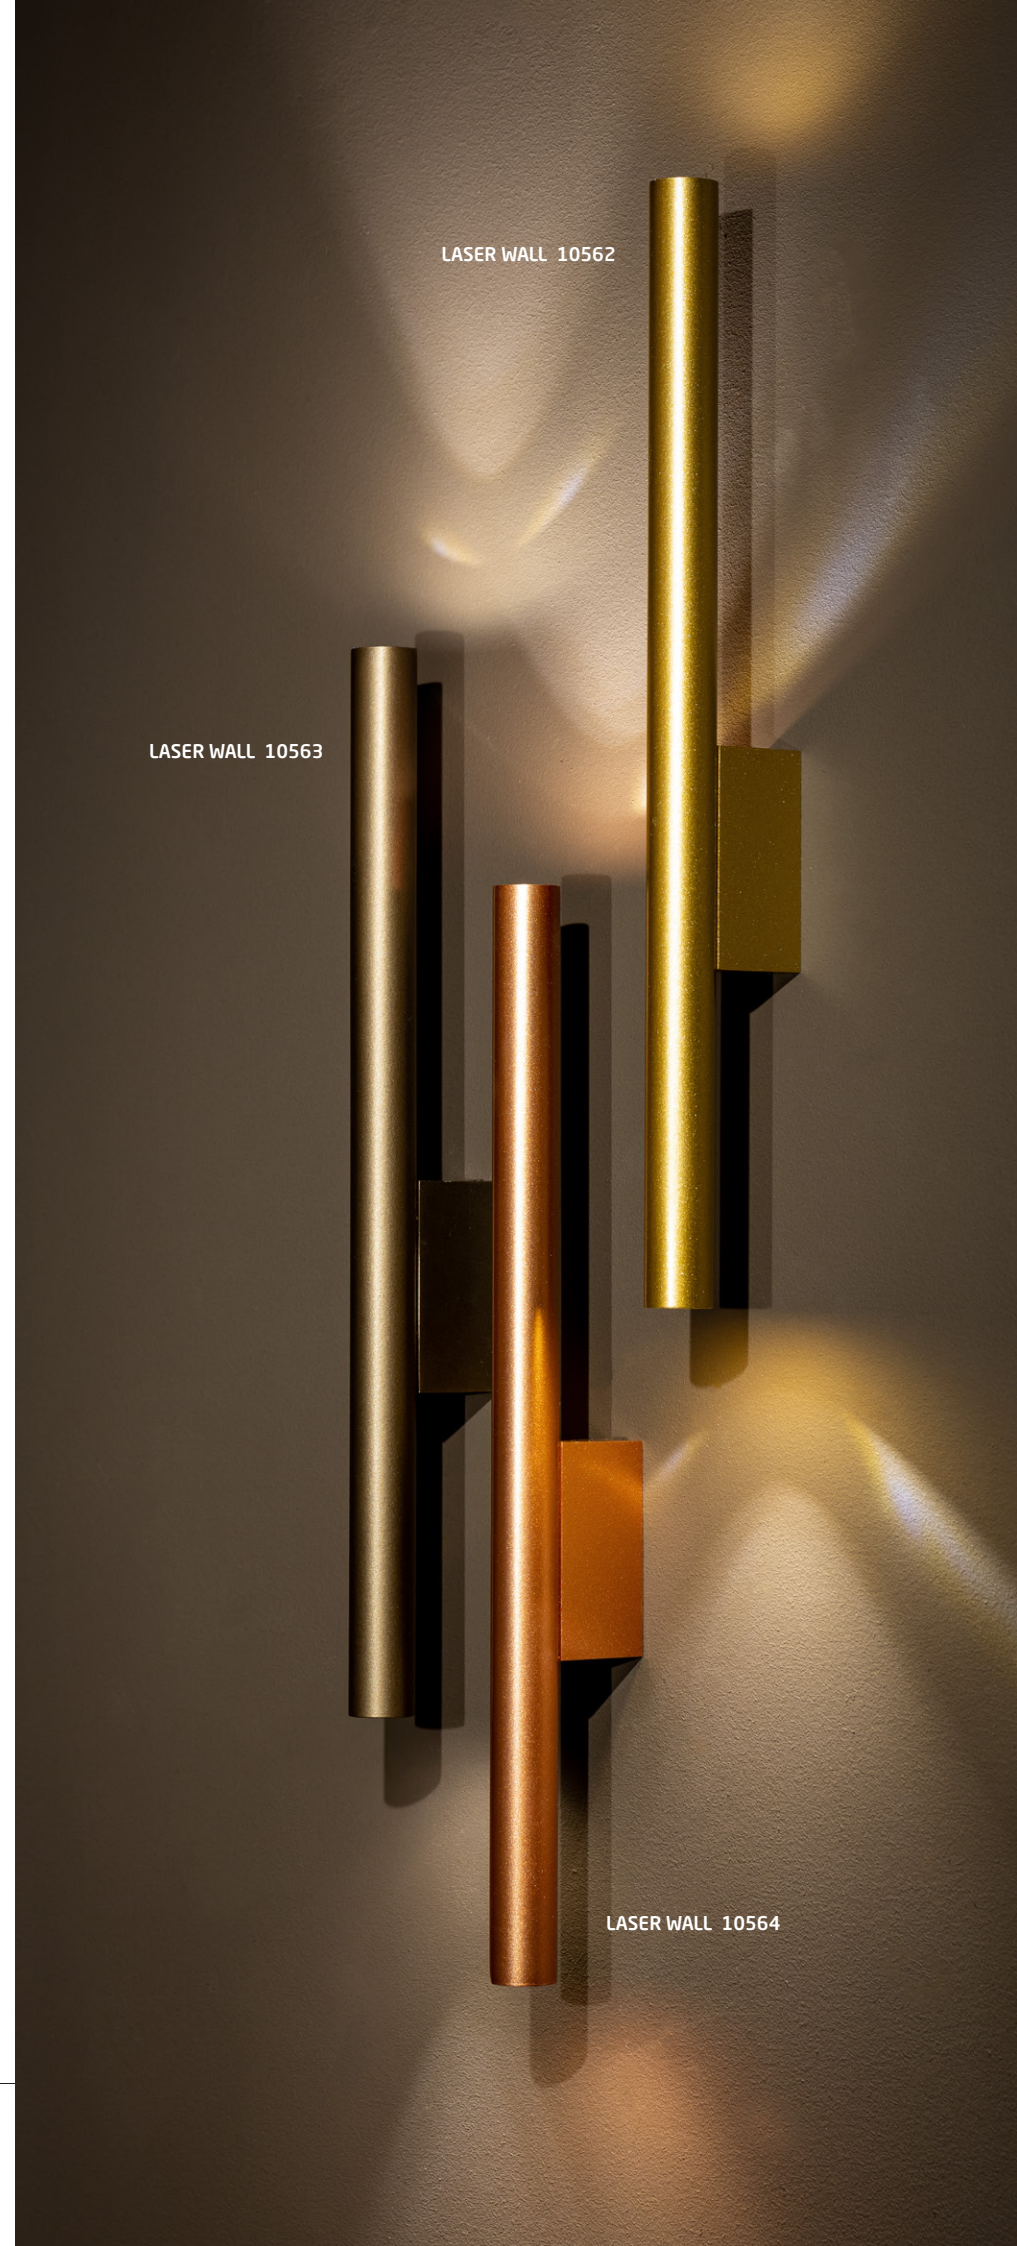


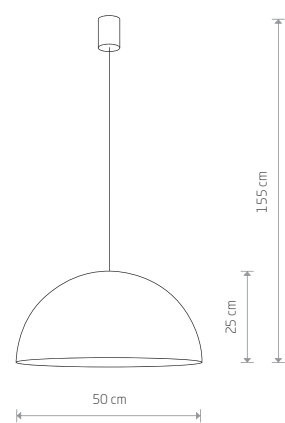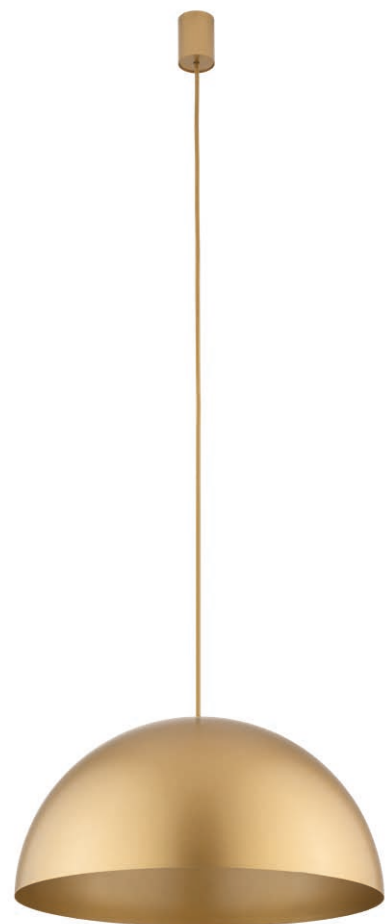

HEMISPHERE SUPER L
 painted steel, braided cable

10296 10297 10298

4xGX53, max 8W

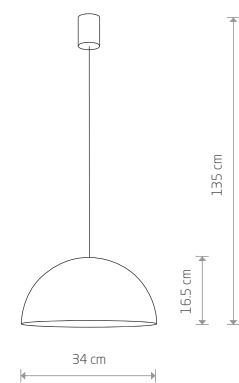

HEMISPHERE SUPER S
 painted steel, braided cable

10618 10617 10616


1xGX53, max 8W



HEMISPHERE SUPER L
 10296



CANDY 10295

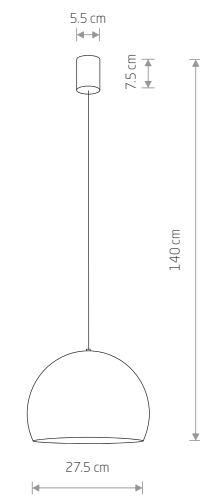


CANDY
painted steel

- 10293 10294 10295
- 10335 10334
- 1xGU10, max 10W



CANOE 10326

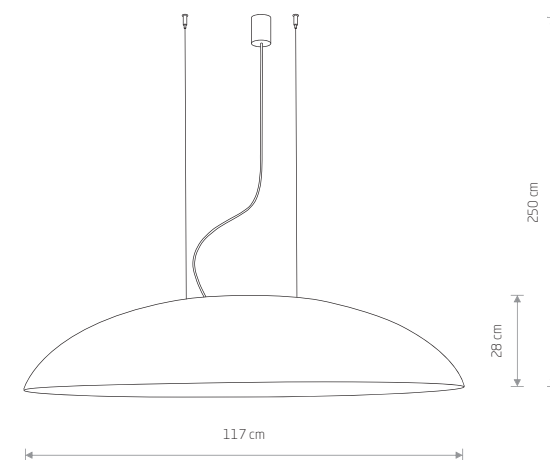



CANOE
composite, steel

10326 10322

5xE27, max 40W




BLACK P014 RAL 9005 WHITE P003 RAL 9003 COPPER

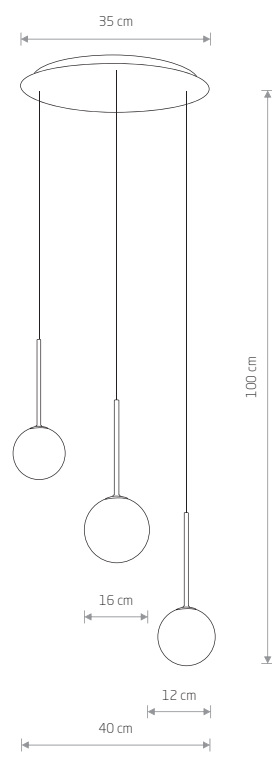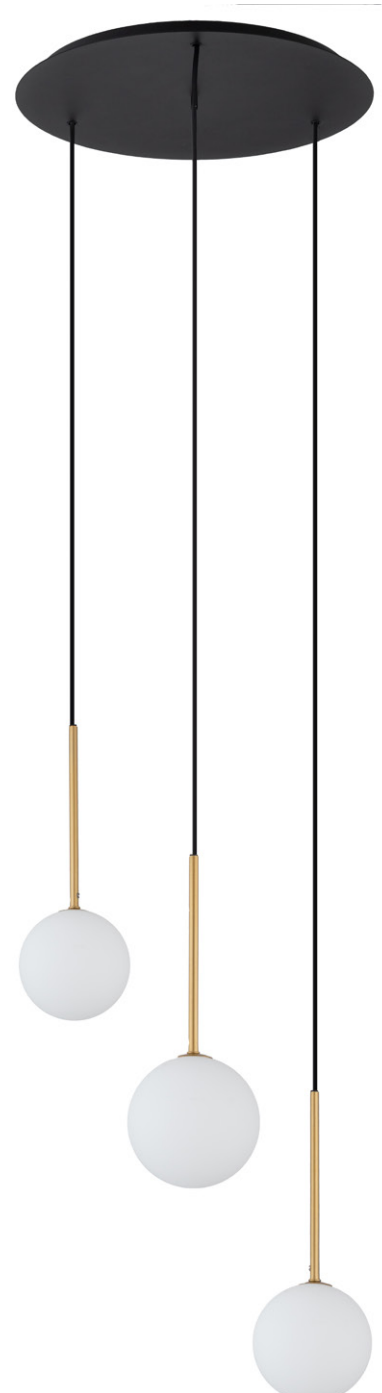

KARO
 painted steel, glass
 10304
 3xG9, max 12W




KARO
 painted steel, glass
 10305
 1xG9, max 12W

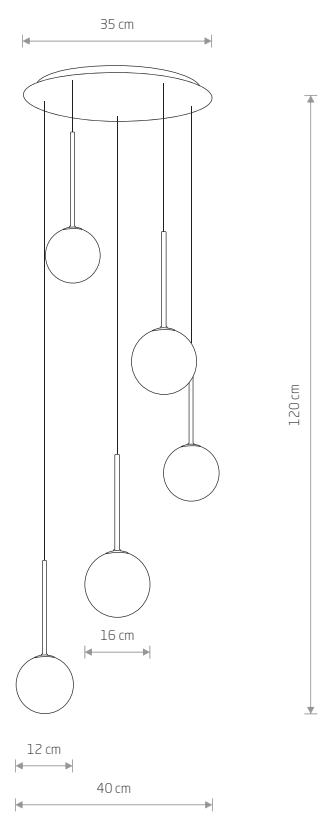

KARO
 painted steel, glass
 10303
 5xG9, max 12W



KARO 10303




KIER M

painting steel, glass

■ 10307 ■ 10306

● 1xG9, max 12W




KIER S

painting steel, glass

■ 10302

● 1xG9, max 12W

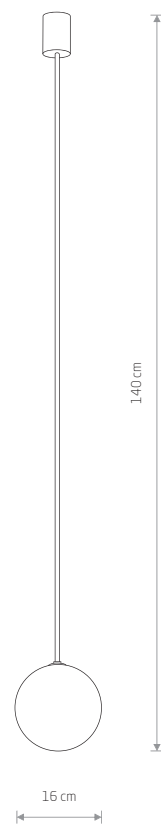

KIER L


painting steel, glass

■ 10310 ■ 10308

● 1xG9, max 12W



PIK 10301




PIK

painting aluminum, glass

■ 10299

● 1xG9, max 12W




PIK

painting aluminum, glass

■ 10300

● 2xG9, max 12W

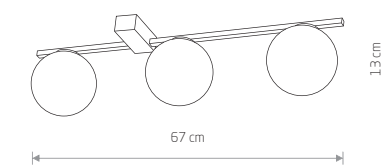


PIK

painting aluminum, glass

■ 10301

● 3xG9, max 12W

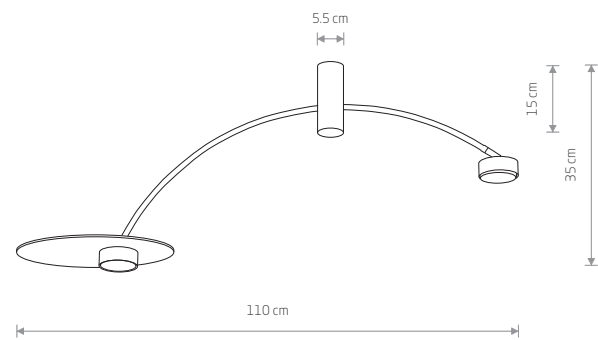

HEFT

■ painted steel, plywood

■ 10356


● 2xGX53, max 8W

HEFT 10356






SUNSET NATURAL A
10576

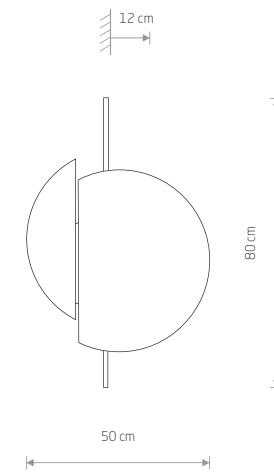

SUNSET NATURAL B
plywood, painted steel

10577


2xGX53, max 8W

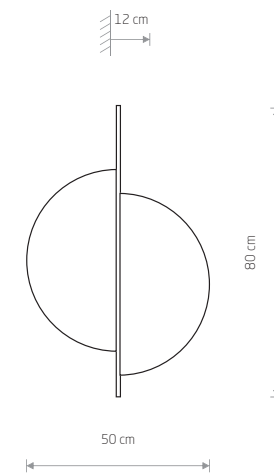

SUNSET NATURAL C
plywood, painted steel

10578


2xGX53, max 8W

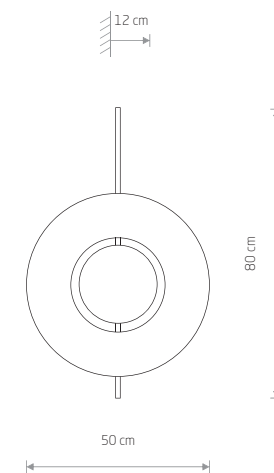

SUNSET NATURAL A
plywood, painted steel

10576


2xGX53, max 8W

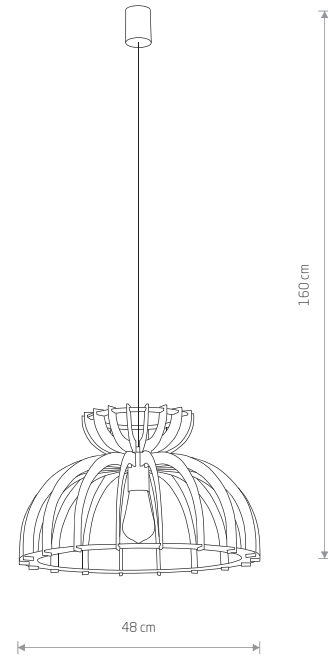

KYMI C
plywood, painted steel, braided cable

10572 10575


1xE27, max 60W

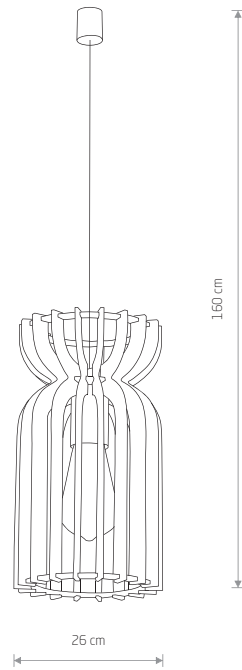

KYMI A
plywood, painted steel, braided cable

10570 10573

1xE27, max 60W

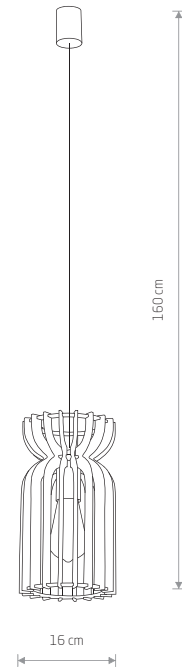

KYMI B
plywood, painted steel, braided cable

10571 10574

1xE27, max 60W




KYMI C 10575



MALMO 10457


BERGEN 10455



HAGA
aluminum

10456

2xG9, max 10W only LED



BERGEN
aluminum

10455

2xGU10, max 10W only LED




MALMO
aluminum

10457


2xGU10, max 10W only LED



RING LED M 10347

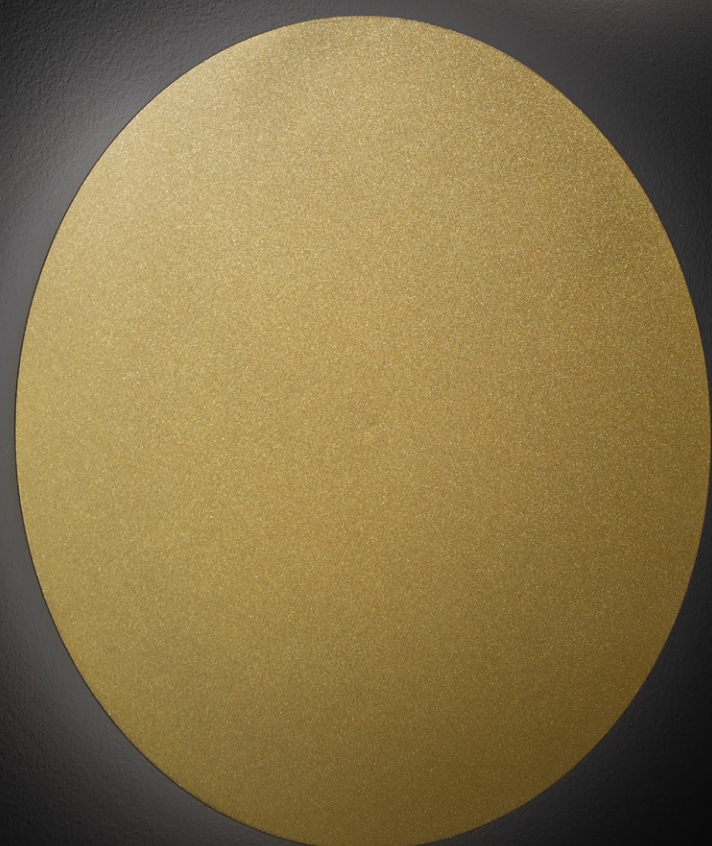


RING LED L 10351

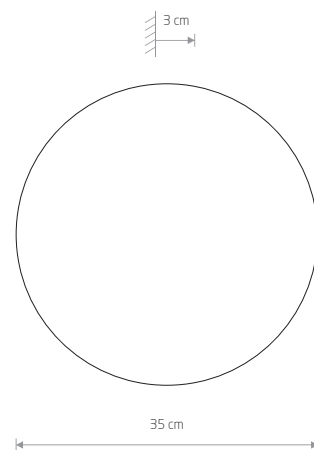

RING LED L

Painted steel


10353 10348 10351

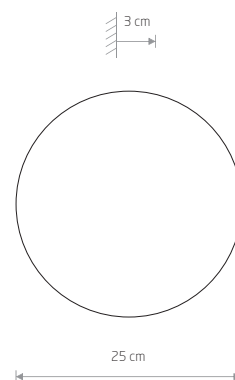

RING LED M

Painted steel

10352 10347 10350



RING LED S


Painted steel

10315 10316 10317




Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10315	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10316	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊖	>0.5	IP20	50000h
10317	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10347	10W LED	3000K	150 lm	>90	~220-230 V, 50/60 Hz	⊖	>0.5	IP20	50000h
10350	10W LED	3000K	150 lm	>90	~220-230 V, 50/60 Hz	⊖	>0.5	IP20	50000h
10352	10W LED	3000K	150 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10348	15W LED	3000K	200 lm	>90	~220-230 V, 50/60 Hz	⊖	>0.5	IP20	50000h
10351	15W LED	3000K	200 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10353	15W LED	3000K	200 lm	>90	~220-230 V, 50/60 Hz	⊖	>0.5	IP20	50000h

SATINE CHOCOLATE P025
 SATINE COPPER P024
 SATINE GOLD P023

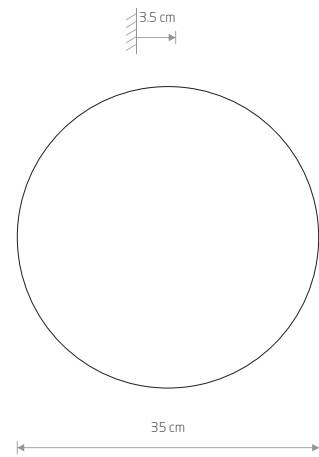


RING WOOD LED L
plywood, painted steel

10282




RING WOOD LED S
plywood, painted steel

10280

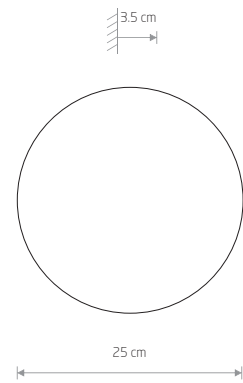


RING WOOD LED M
plywood, painted steel

10281

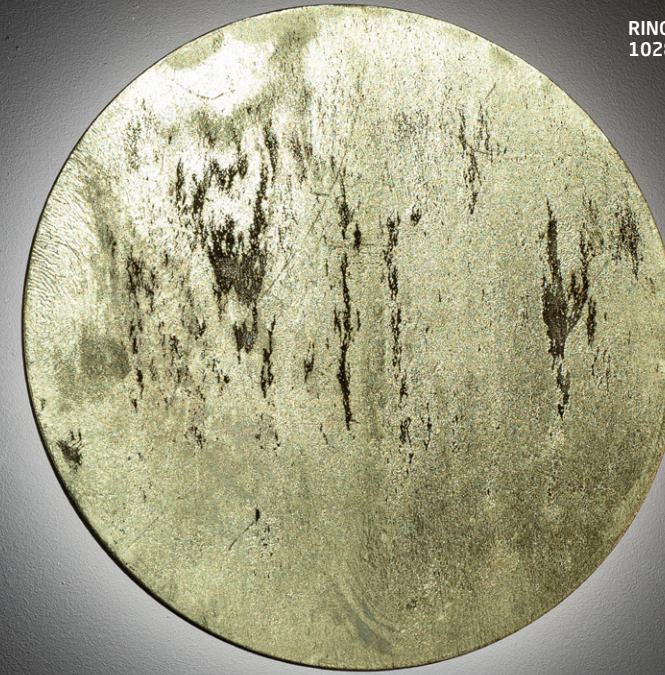


RING WOOD LED M
10281

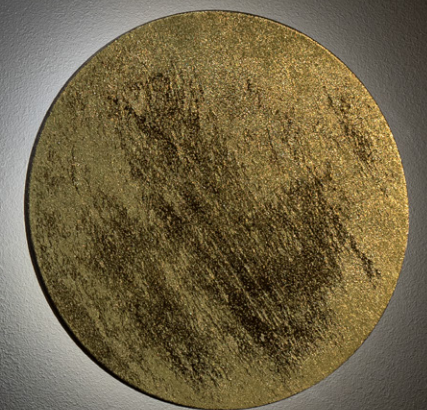

RING WOOD LED S
10280


Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10280	7W LED	3000K	60 lm	>90	220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10281	10W LED	3000K	150 lm	>90	220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10282	15W LED	3000K	200 lm	>90	220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h

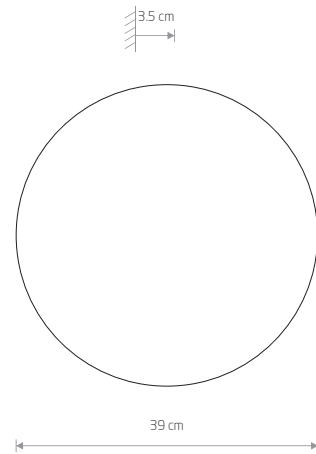

RING MIRROR LED L

glass, painted steel


10278



RING MIRROR LED S

glass, painted steel

10276

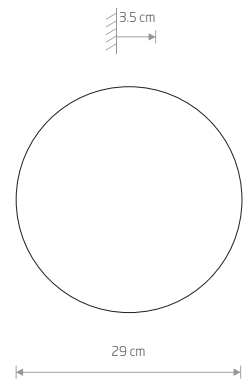

RING MIRROR LED M

glass, painted steel

10277




Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10276	7W LED	3000K	40 lm	>90	220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10277	9W LED	3000K	90 lm	>90	220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h
10278	15W LED	3000K	130 lm	>90	220-230 V, 50/60 Hz	⊕	>0.5	IP20	50000h



RING MIRROR LED L
10278



RING MIRROR LED M
10277

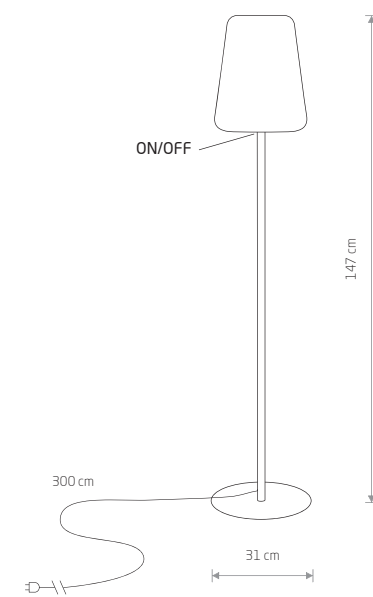

PATIO

■ painted steel, plastic LLDPE

■ 10105

■ 1xE27, max 40W





STONE M
10580




STONE L
10581



STONE S
10579



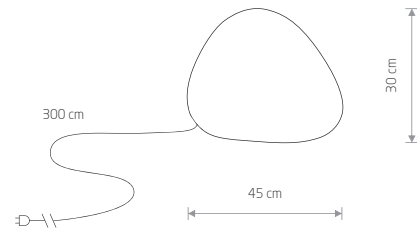


STONE S

plastic PE

10579

1xE27, max 25W

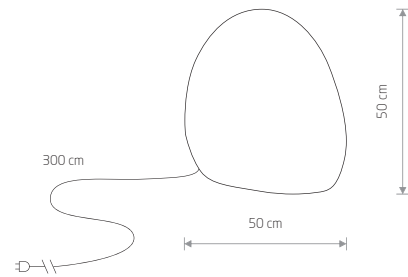


STONE M

plastic PE

10580

1xE27, max 25W

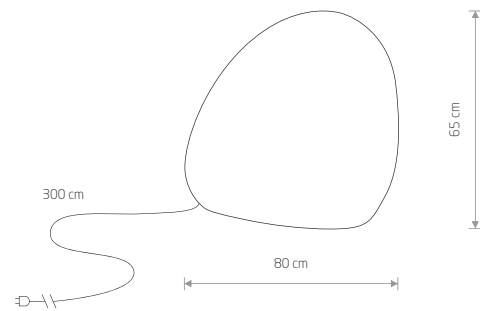

STONE L

plastic PE


10581




1xE27, max 25W





Nowodvorski
LIGHTING

 Nowodvorski Lighting sp. z o.o.
ul. Bojemskiego 11
42-202 Częstochowa
POLAND

 +48 34 344 91 10 / 11
 nowodvorski@nowodvorski.com
 www.nowodvorski.com





www.nowodvorski.com